- ★ Super Low Gate Charge
- ★ 100% EAS Guaranteed
- ★ Green Device Available
- ★ Excellent CdV/dt effect decline
- ★ Advanced high cell density Trench technology

Product Summary

Green


BVDSS	RDSON	ID
40V	2.6mΩ	150A


Description

The XR150N04F is the high desity N-ch MOSFETs, which provides excellent RDSON and gate charge for most of the synchronous buck converter applications .

The XR150N04F meets the RoHS and Green Product requirements 100% EAS guaranteed with full function reliability approved.

PDFN5060-8L Pin Configuration





Absolute Maximum Ratings

Symbol	Parameter	Rating	Units
V_{DS}	Drain-Source Voltage	40	V
V_{GS}	Gate-Source Voltage	±25	V
I_D@T_C=25℃	Continuous Drain Current, V_{GS} @ 10V[1,6]	150	A
I_D@T_C=100℃	Continuous Drain Current, V_{GS} @ 10V[1,6]	97	A
I_{DM}	Pulsed Drain Current[2]	600	A
EAS	Single Pulse Avalanche Energy[3]	196	mJ
I_{AS}	Avalanche Current	28	A
P_D@T_C=25℃	Total Power Dissipation[4]	61	W
T_{STG}	Storage Temperature Range	-55 to 150	℃
T_J	Operating Junction Temperature Range	-55 to 150	℃

Thermal Data

Symbol	Parameter	Typ.	Max.	Unit
$R_{\theta JA}$	Thermal Resistance Junction-Ambient [1]	---	---	℃/W
$R_{\theta JC}$	Thermal Resistance Junction-Case[1]	---	2	℃/W

Electrical Characteristics (T_J=25 ℃, unless otherwise noted)

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
BV_{DSS}	Drain-Source Breakdown Voltage	V_{GS}=0V , I_D=250uA	40	---	---	V
$\triangle BV_{DSS}/\triangle T_J$	BV_{DSS} Temperature Coefficient	Reference to 25℃ , I_D=1mA	---	---	---	V/℃
$R_{DS(ON)}$	Static Drain-Source On-Resistance[2]	V_{GS}=10V , I_D=45A	---	2.6	3.4	mΩ
		V_{GS}=4.5V , I_D=20A	---	---	---	
$V_{GS(th)}$	Gate Threshold Voltage	V_{GS}=V_{DS} , I_D =250uA	2	2.8	4	V
$\triangle V_{GS(th)}$	$V_{GS(th)}$ Temperature Coefficient		---	---	---	mV/℃
I_{DSS}	Drain-Source Leakage Current	V_{DS}=40V , V_{GS}=0V , T_J=25℃	---	---	1	uA
		V_{DS}=40V, V_{GS}=0V , T_J=100℃	---	---	100	
I_{GSS}	Gate-Source Leakage Current	V_{GS}=±25V , V_{DS}=0V	---	---	±100	nA
gfs	Forward Transconductance	V_{DS}=5V , I_D=20A	---	---	---	S
R_g	Gate Resistance	V_{DS}=0V , V_{GS}=0V , f=1MHz	---	---	---	Ω
Q_g	Total Gate Charge	V_{DS}=20V , V_{GS}=10V , I_D=45A	---	80	---	nC
Q_{gs}	Gate-Source Charge		---	17	---	
Q_{gd}	Gate-Drain Charge		---	21	---	
$T_{d(on)}$	Turn-On Delay Time	VGS=10V, VDD=20V, RG=3Ω, RL=1Ω, ID=45A	---	21	---	ns
T_r	Rise Time		---	32	---	
$T_{d(off)}$	Turn-Off Delay Time		---	71	---	
T_f	Fall Time		---	40	---	
C_{iss}	Input Capacitance	V_{DS}=20V , V_{GS}=0V , f=1MHz	---	4900	---	pF
C_{oss}	Output Capacitance		---	528	---	
C_{rss}	Reverse Transfer Capacitance		---	317	---	

Diode Characteristics

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
I_S	Continuous Source Current[1,5]	V_G=V_D=0V , Force Current	---	---	150	A
V_{SD}	Diode Forward Voltage[2]	V_{GS}=0V , I_S=45A , T_J=25℃	---	---	1.2	V

Notes:1. Repetitive Rating: Pulse Width Limited by Maximum Junction Temperature

2. EAS condition: T_J=25℃, V_{DD}=20V, V_G=10V, R_G=25Ω, L=0.5mH, I_{AS}=28A

3. Pulse Test: Pulse Width≤300μs, Duty Cycle≤0.5%

Typical Performance Characteristics

Figure1: Output Characteristics

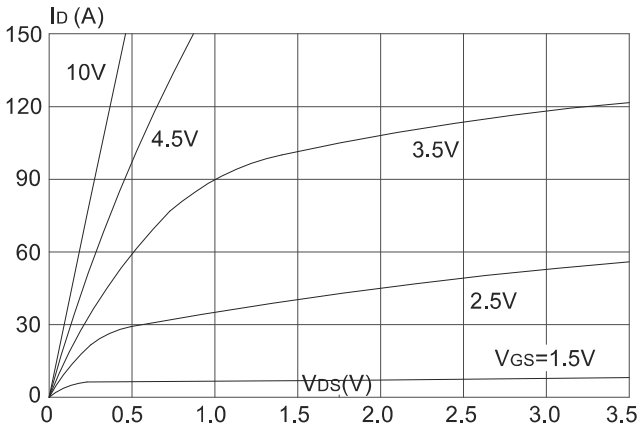


Figure 2: Typical Transfer Characteristics

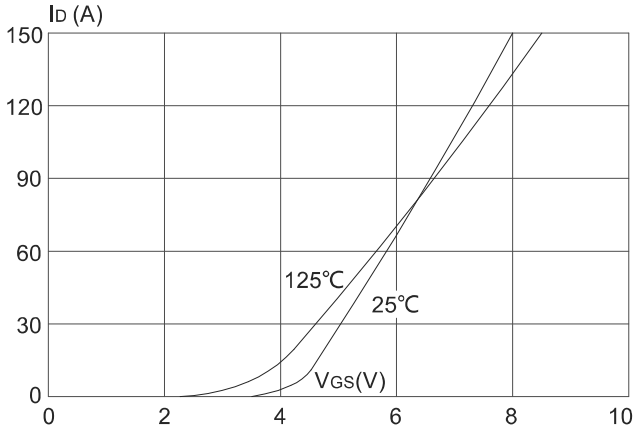


Figure 3: On-resistance vs. Drain Current

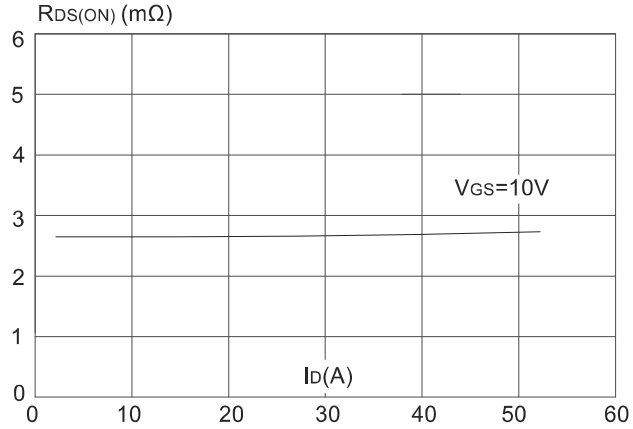


Figure 4: Body Diode Characteristics

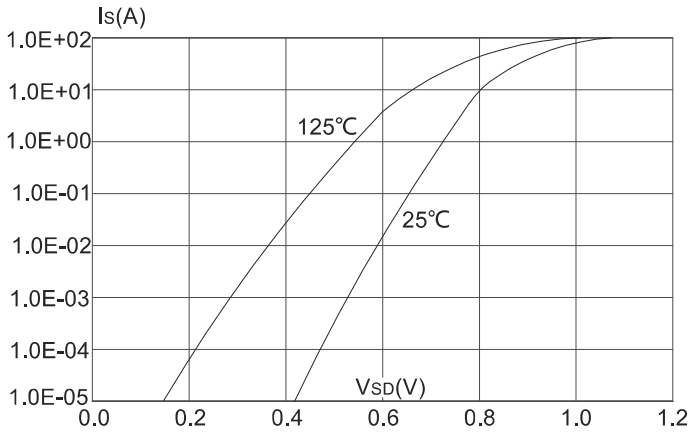


Figure 5: Gate Charge Characteristics

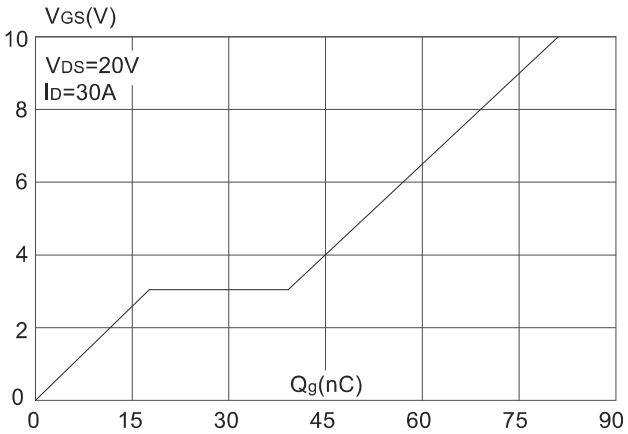


Figure 6: Capacitance Characteristics

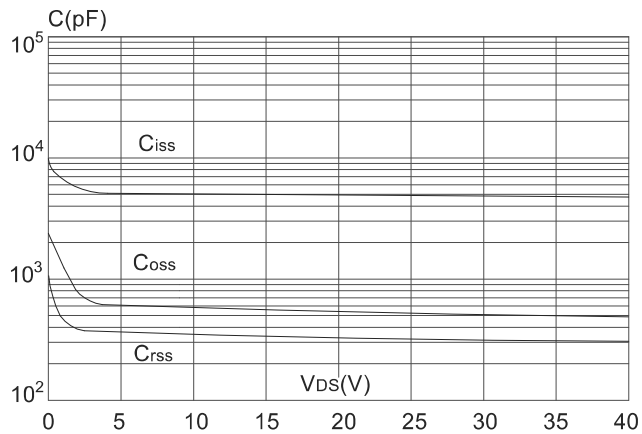


Figure 7: Normalized Breakdown Voltage vs. Junction Temperature

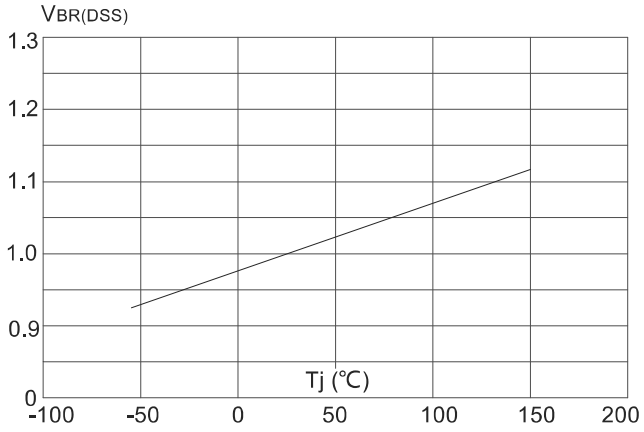


Figure 8: Normalized on Resistance vs. Junction Temperature

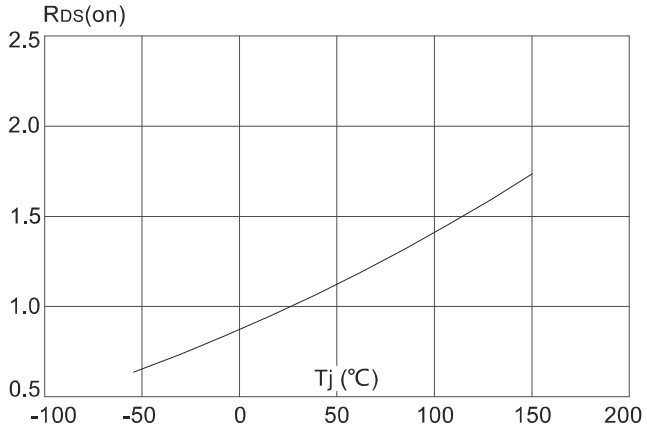


Figure 9: Maximum Safe Operating Area

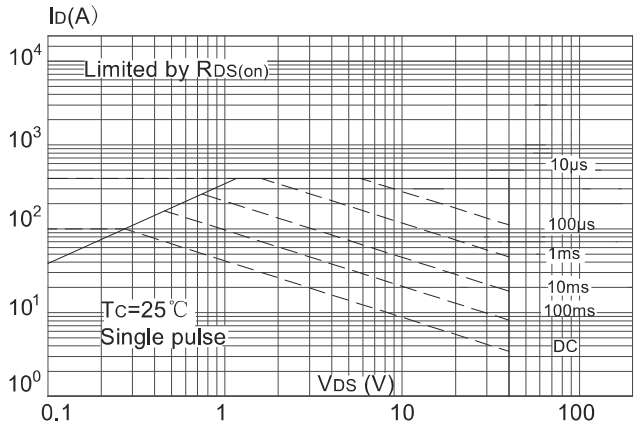


Figure 10: Maximum Continuous Drain Current vs. Case Temperature



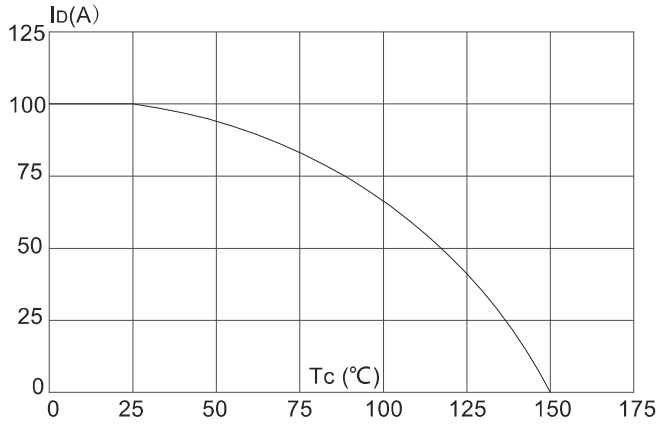


Figure.11: Maximum Effective Transient Thermal Impedance, Junction-to-Case

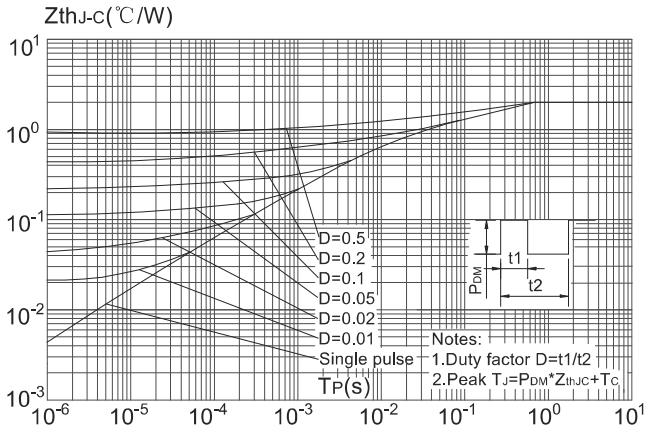

Package Mechanical Data-PDFN5060-8L-JQ Single

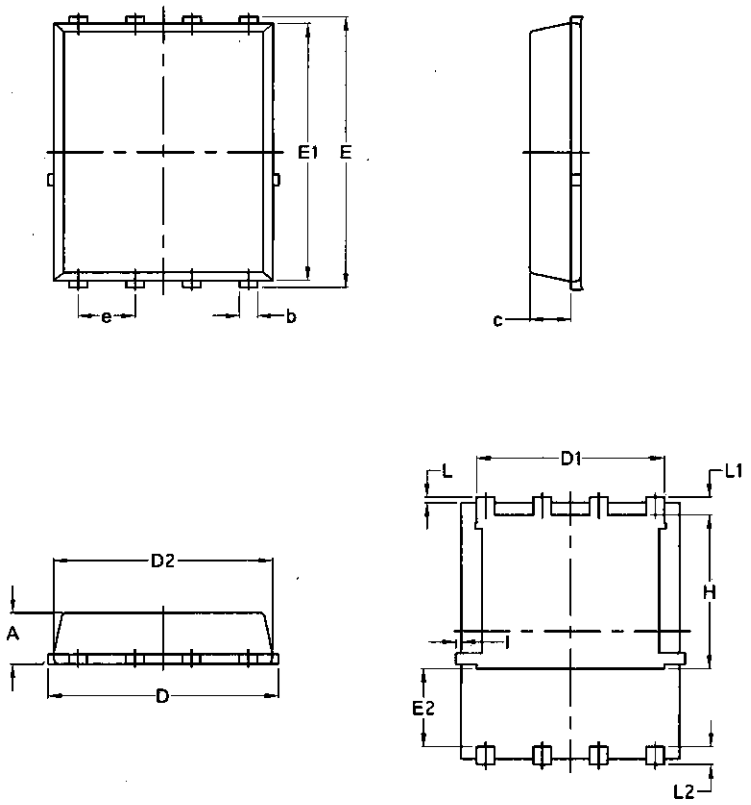

Symbol	Common			
	mm		Inch	
	Mim	Max	Min	Max
A	1.03	1.17	0.0406	0.0461
b	0.34	0.48	0.0134	0.0189
c	0.90	1.10	0.0354	0.0433
D	4.80	5.40	0.1890	0.2126
D1	4.11	4.31	0.1618	0.1697
D2	4.80	5.00	0.1890	0.1969
E	5.95	6.15	0.2343	0.2421
E1	5.65	5.85	0.2224	0.2303
E2	1.60	/	0.0630	/
e	1.27 BSC		0.05 BSC	
L	0.05	0.25	0.0020	0.0098
L1	0.38	0.50	0.0150	0.0197
L2	0.38	0.50	0.0150	0.0197
H	3.30	3.50	0.1299	0.1378
I	/	0.18	/	0.0070