P-Ch 15V Fast Switching MOSFETs

- ★ Super Low Gate Charge
- ★ Green Device Available
- ★ Excellent CdV/dt effect decline
- ★ Advanced high cell density Trench technology

Product Summary

Green


BVDSS	RDSON	ID
-15V	6.5mΩ	-25A


Description

The XR25P01M is the high cell density trenched P-ch MOSFETs, which provide excellent RDSON and gate charge for most of the synchronous buck converter applications.

The XR25P01M meet the RoHS and Green Product requirement with full function reliability approved.

DFN2020-6L Pin Configuration





Absolute Maximum Ratings

Symbol	Parameter	Rating	Units
V_{DS}	Drain-Source Voltage	-15	V
V_{GS}	Gate-Source Voltage	±12	V
I_D@T_C=25℃	Continuous Drain Current, V_{GS} @ -4.5V[1]	-25	A
I_D@T_C=70℃	Continuous Drain Current, V_{GS} @ -4.5V[1]	-18	A
I_{DM}	Pulsed Drain Current[2]	-120	A
P_D@T_C=25℃	Total Power Dissipation[3]	18	W
P_D@T_C=70℃	Total Power Dissipation[3]	12	W
T_{STG}	Storage Temperature Range	-55 to 150	℃
T_J	Operating Junction Temperature Range	-55 to 150	℃

Thermal Data

Symbol	Parameter	Max.	Unit
$R_{\theta JA}$	Thermal Resistance Junction-Ambient [1]	156	℃/W
$R_{\theta JA}$	Thermal Resistance Junction-Ambient [1] (t ≤10s)	---	℃/W
$R_{\theta JC}$	Thermal Resistance Junction-Case[1]	4.2	℃/W

Electrical Characteristics (T_J=25 ℃, unless otherwise noted)

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
BV_{DSS}	Drain-Source Breakdown Voltage	V_{GS}=0V , I_D=-250uA	-15	---	---	V
$\triangle BV_{DSS}/\triangle T_J$	BV_{DSS} Temperature Coefficient	Reference to 25℃ , I_D=-1mA	---	-0.012	---	V/℃
$R_{DS(ON)}$	Static Drain-Source On-Resistance[2]	V_{GS}=-4.5V , I_D=-15A	---	6.5	9	mΩ
		V_{GS}=-2.5V , I_D=-5A	---	9.5	13	
$V_{GS(th)}$	Gate Threshold Voltage	V_{GS}=V_{DS} , I_D =-250uA	-0.4	-0.7	-1.0	V
$\triangle V_{GS(th)}$	$V_{GS(th)}$ Temperature Coefficient		---	2.94	---	mV/℃
I_{DSS}	Drain-Source Leakage Current	V_{DS}=-12V , V_{GS}=0V , T_J=25℃	---	---	1	uA
I_{GSS}	Gate-Source Leakage Current	V_{GS}=±12 V , V_{DS}=0V	---	---	±100	nA
gfs	Forward Transconductance	V_{DS}=-5V , I_D=-10A	---	43	---	S
Q_g	Total Gate Charge (-4.5V)	V_{DS}=-10V , V_{GS}=-4.5V , I_D=-10A	---	35	---	nC
Q_{gs}	Gate-Source Charge		---	5.0	---	
Q_{gd}	Gate-Drain Charge		---	10	---	
$T_{d(on)}$	Turn-On Delay Time	V_{DD}=-10V , V_{GS}=-4.5V , R_G=3.3Ω, I_D=-10A	---	12.0	---	ns
T_r	Rise Time		---	40.0	---	
$T_{d(off)}$	Turn-Off Delay Time		---	30	---	
T_f	Fall Time		---	10	---	
C_{iss}	Input Capacitance	V_{DS}=-15V , V_{GS}=0V , f=1MHz	---	2800	---	pF
C_{oss}	Output Capacitance		---	690	---	
C_{rss}	Reverse Transfer Capacitance		---	590	---	

Diode Characteristics

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
I_S	Continuous Source Current[1,4]	V_G=V_D=0V , Force Current	---	---	-25.0	A
I_{SM}	Pulsed Source Current[2,4]		---	---	----	A
V_{SD}	Diode Forward Voltage[2]	V_{GS}=0V , I_S=-1A , T_J=25℃	---	---	-1.2	V
t_{rr}	Reverse Recovery Time	IF=-10A , dI/dt=100A/μs , T_J =25℃	---	27	---	nS
Q_{rr}	Reverse Recovery Charge		---	17.8	---	nC

Note :
1. The data tested by surface mounted on a 1 inch^2 FR-4 board with 2OZ copper.
2. The data tested by pulsed , pulse width ≦ 300us , duty cycle ≦ 2%
3. The power dissipation is limited by 150℃ junction temperature
4. The data is theoretically the same as I_D and I_{DM} , in real applications , should be limited by total power dissipation.

Typical Characteristics

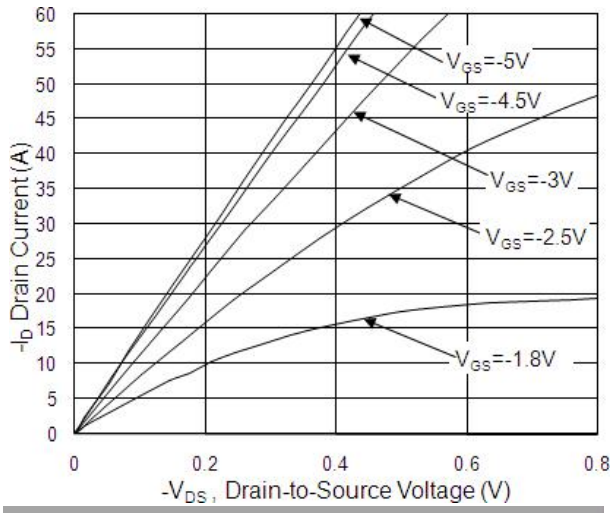


Fig.1 Typical Output Characteristics

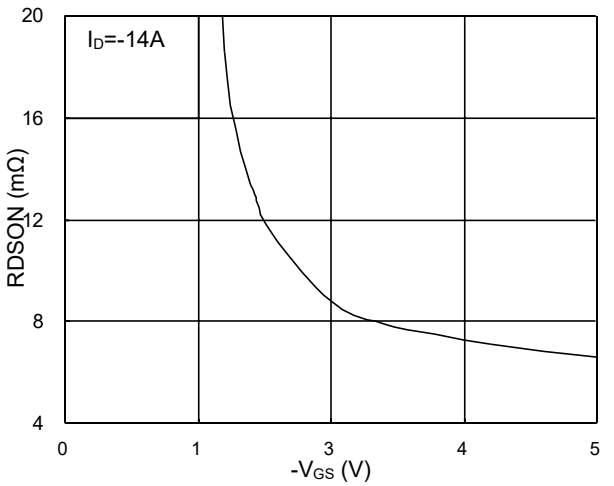


Fig.2 On-Resistance vs. G-S Voltage

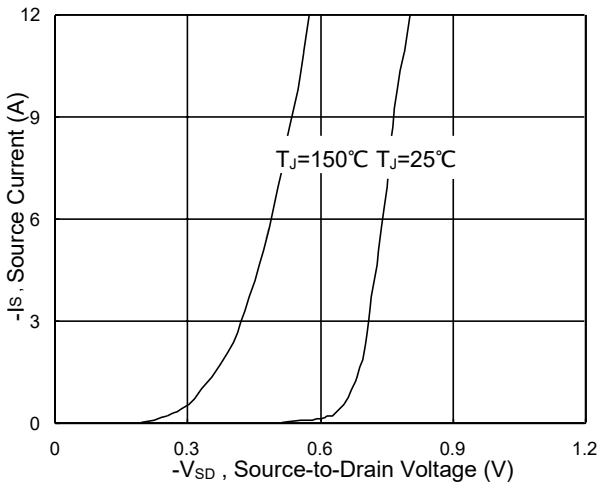


Fig.3 Forward Characteristics of Reverse

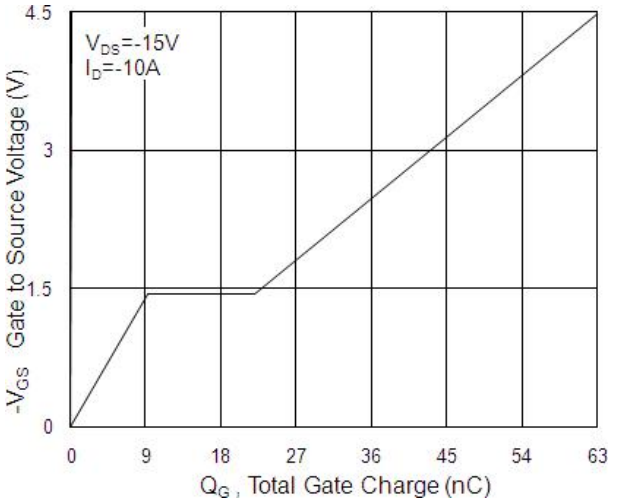


Fig.4 Gate-charge Characteristics

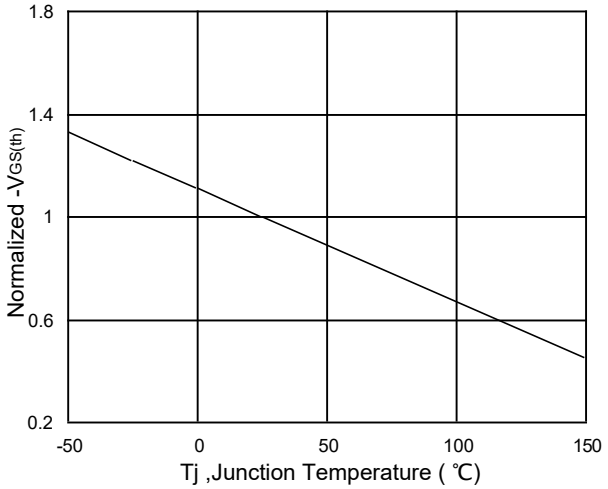


Fig.5 Normalized $V_{GS(th)}$ vs. T_J

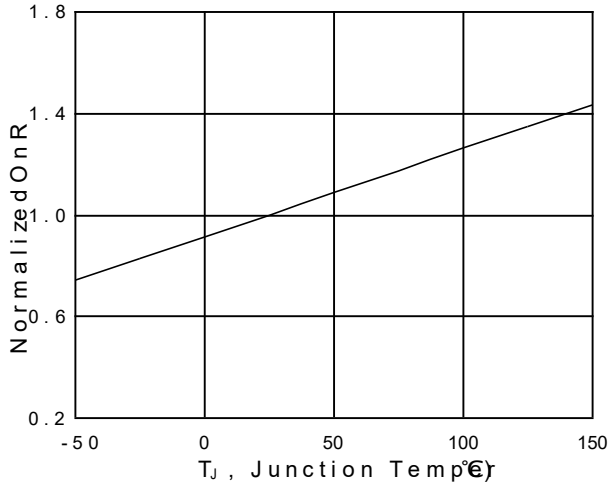


Fig.6 Normalized R_{DSON} vs. T_J

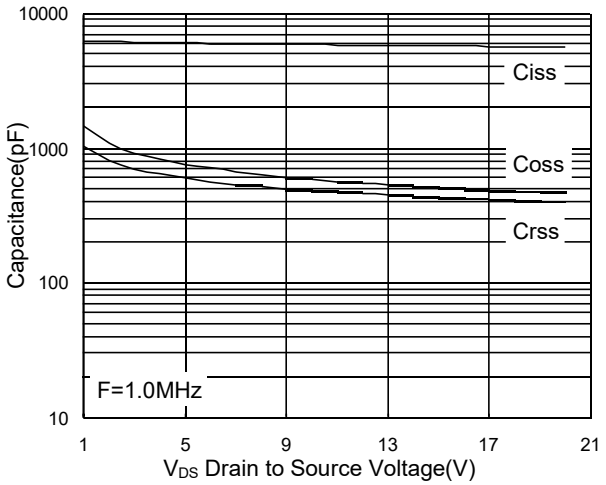


Fig.7 Capacitance

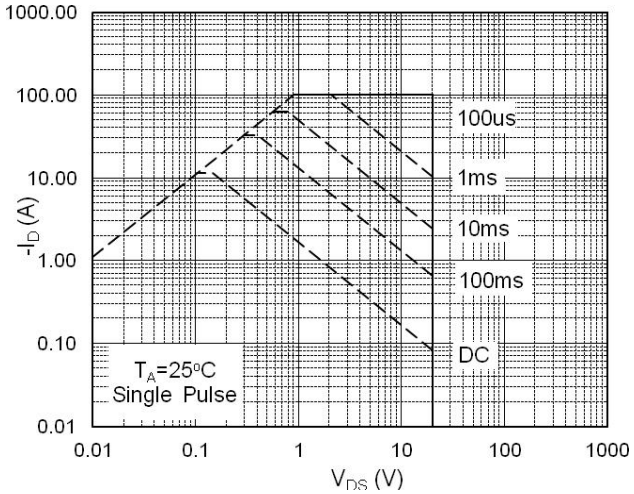


Fig.8 Safe Operating Area

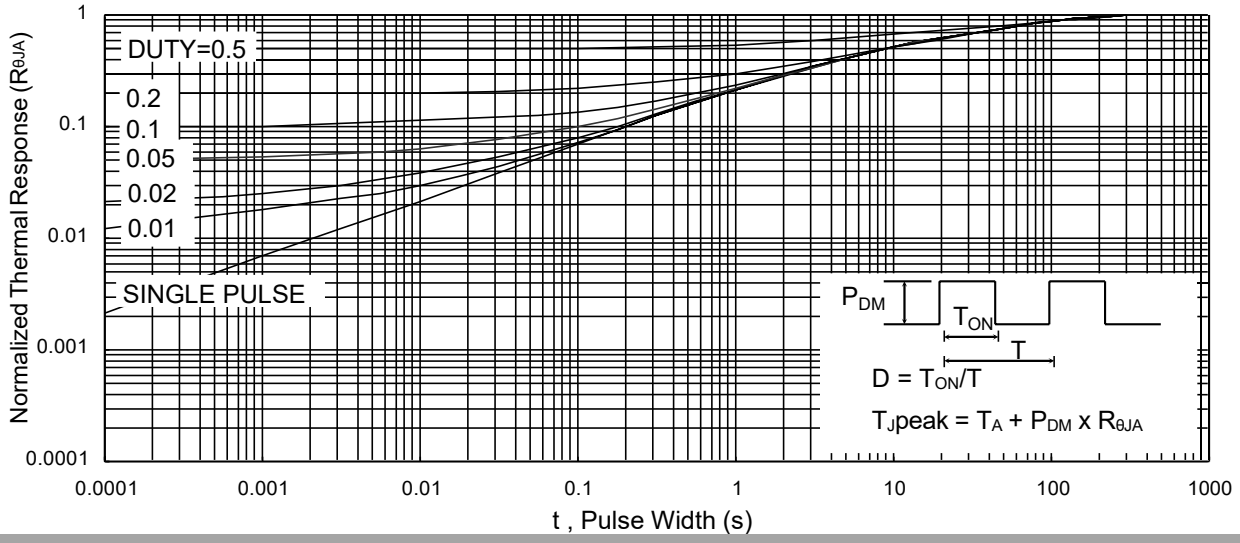


Fig.9 Normalized Maximum Transient Thermal Impedance

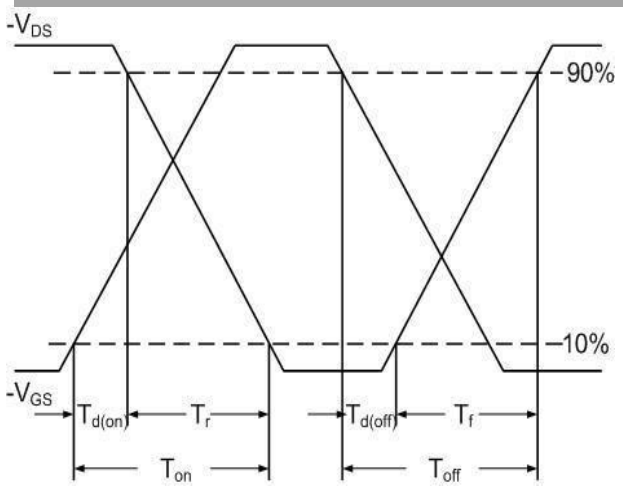


Fig.10 Switching Time Waveform


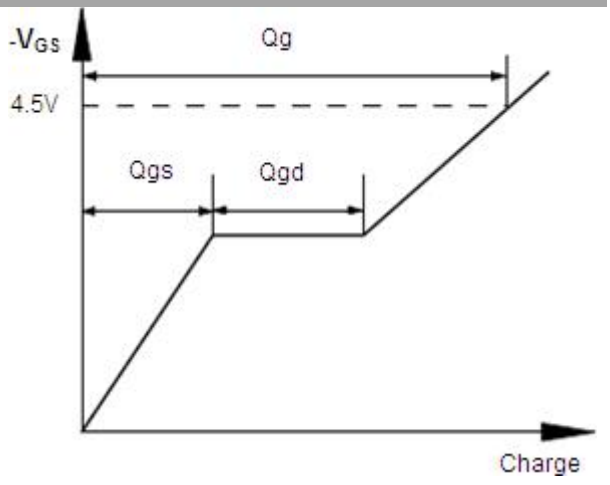


Fig.11 Gate Charge Waveform

DFN2020-6L Package Information

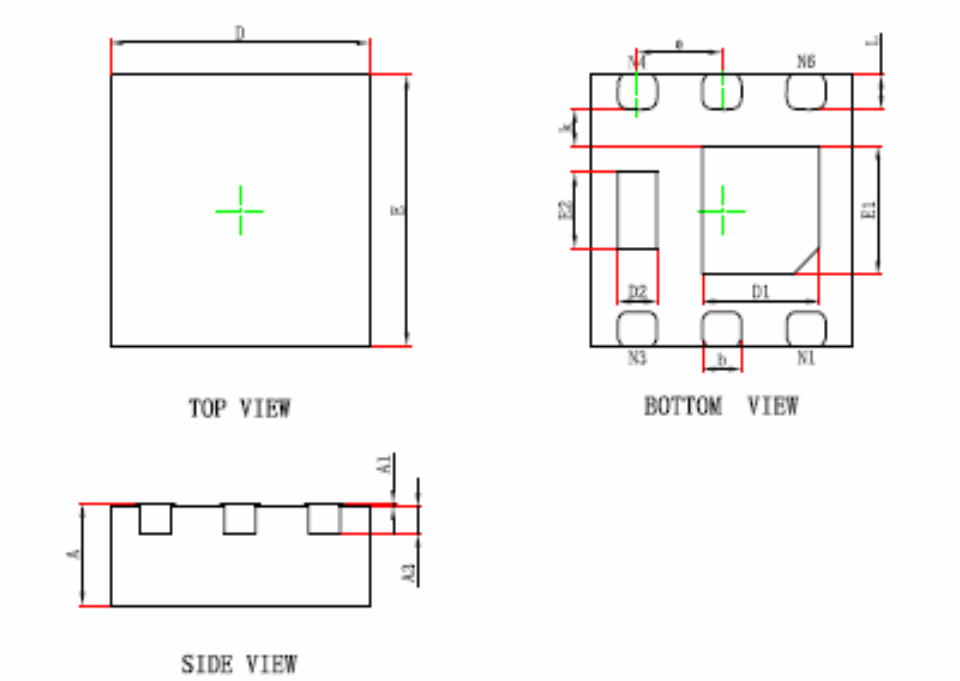

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.700	0.800	0.028	0.031
A1	0.000	0.050	0.000	0.002
A3	0.203REF.		0.008REF.	
D	1.924	2.076	0.076	0.082
E	1.924	2.076	0.076	0.082
D1	0.800	1.000	0.031	0.039
E1	0.850	1.050	0.033	0.041
D2	0.200	0.400	0.008	0.016
E2	0.460	0.660	0.018	0.026
k	0.200MIN.		0.008MIN.	
b	0.250	0.350	0.010	0.014
e	0.650TYP.		0.026TYP.	
L	0.174	0.326	0.007	0.013